harmeni

Harmoni Flex

The Harmoni Flex loose laid cable system provides a flexible and easy under tile heating solution for any floor size or shape. Harmoni Flex is suitable for use beneath most floor types such as ceramic and porcelain tiles, limestone etc. Its thin heating element keeps floor depth to a minimum.



The Harmoni lifetime warranty ensures your product gives you a lifetime of trouble-free use and is guaranteed against manufacturer defects for the lifetime of the initial floor covering.

FEATURES

- Easy to install
- Twin conductor heating cable
- Suitable for most floor surfaces
- Can be installed within the thickness of tile adhesive

SPECIFICATION

Cable thickness:	4mm
Cold tail:	4m
Cable shape:	Round
Cable colour:	Blue
Tensile strength:	120 Nm
Deformation strength:	2000 Nm
Voltage:	230V
Conductor insulation:	FEP
Screen:	100% aluminium screen + bi-conductor
Outer cover material:	PVC
Max. temperature:	80°C
Output per m ² :	10W/m at 230 V
Standards	Intertek S Mark




Edison House Edison Close Ransomes Europark Ipswich , Suffolk IP3 9GU United Kingdom

Tel: 01473 559088 Fax: 01473 276678 Email: info@harmoniheating.co.uk Web: www.harmoniheating.co.uk



The installer warranty guarantees if you damage your Harmoni product before your finished floor surface is installed, we will replace it with an equivalent product free of charge.



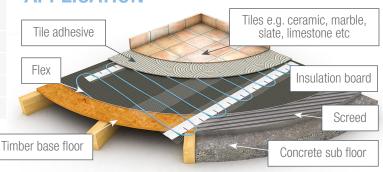

hormoni electric underfloor heating