


SLIMLINE - 600




Front View

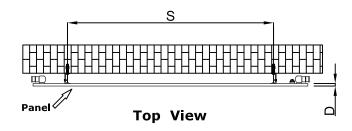


-Horizontal Mounting
-Optional Rail Colour Selection
-Max Operational Pressure: 6 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm



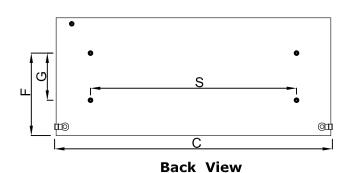

SUPPLIED INSTALLATION ACCESSORIES

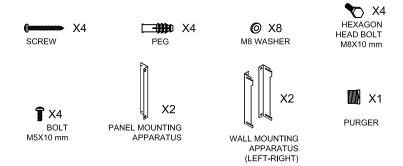

Due do et Nove	Bus does Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Welght	Thermal Output
Product Name Product Co	Product Code	Н	W	D	С	S	F	G	1	ı	Watt - BTU/hr
		mm	mm	mm	mm	mm	mm	mm	L	kg	(Δ50°)
SLIMLINE 600×400	RND-SLN06004	600	400	13	410	240	420	240	0.7	6.8	316 - 1077
SLIMLINE 600×600	RND-SLN06006	600	600	13	610	420	420	240	1	9.5	474 - 1618
SLIMLINE 600x800	RND-SLN06008	600	800	13	810	450	420	240	1.3	12.2	631 - 2154
SLIMLINE 600×1000	RND-SLN06010	600	1000	13	1010	660	420	240	1.6	14.9	790 - 2695
SLIMLINE 600×1200	RND-SLN06012	600	1200	13	1210	940	420	240	1.9	17.6	947 - 3231
SLIMLINE 600×1400	RND-SLN06014	600	1400	13	1410	1050	420	240	2.3	20.3	1106 - 3772



www.reinadesign.co.uk

info@atayglobal.com

Tel : +44 1787 238540